

LED Ground Burial WLT



WLT LED Ground Burial Uplighter

Benefits

- Saving up to 60-70% Compared to High intensity discharge lamps
- Better visibility & uniformity
- Minimum Maintenance

Features

- Efficient Secondary optics
- Adjustable angle
- Selectable power option
- Useful life of 50,000 Hours

Application


- Tree Uplighter
- Outdoor Landscape
- Building Facade

WLT CORP

C.O: 103, jaina Tower 2, Janakpuri
District Centre, New Delhi-110058
Ph-011-45102277
Email – WLT Corp14gmail.com

Technical Data Sheet of Ground burial Uplighter		
S.No	Technical Parameters	Specified values
Electrical Parameters		
1	Input Voltage range (Driver-Mean well)	120 V-270 V AC
2	Rated Wattage	6W-35W
3	Power factor	≥ 0.95
4	Total harmonic Distortion (THD)	≤ 15%
5	Driver Efficiency	≥ 92%
6	LED Driving Current	350mA to 700mA
7	Control Circuit	CCCV Compatible to LED
Optical Parameters		
1	LED Make	OSRAM/NICHIA/CREE/everlight
2	LED Efficacy	≥ 130 Lumen/watt
3	Color Temperature (CCT)	3000 K to 6500K
4	Color rendering Index (CRI)	≥75
5	Total Lumen Output	580 Lumen-3300 lumen
6	Optical Efficiency	≥90%
7	Beam Angle	>10°-25°
8	Uniformity	as per IS 1944
9	LED Life	≥50,000 hours
Mechanical Parameters		
1	Casing	SS 316 LM
2	Cover	Toughened glass with silicon
3	Fixing spares	Inground with PVC casing for different Wattage
4	Diffuser Efficiency	≥95%
5	Lens Make	Carclo/Khatod
6	Material used for MCPCB	AL. Metal Core
7	PCB type	For Driver Epoxy FR4 & For LED MCPCB
8	Wires & cables	Wires used are Low smoke halogen free & fire retardant
Functional Parameters		
1	Ingress Protection	Entire housing & Driver is IP 65/IP68
2	Temperature & humidity	Temperature range -5to 50° and Humidity 10% to 90% RH
3	Aerodynamics	NA
4	Insulation resistance	IR >2MΩ @500VDC
5	High Voltage Test	1.5 VDC for 1 min
6	Endurance test	400V AC for 4 hours
7	High Voltage Protection	Up to 400V
8	Surge Protection	>4KV
9	EMI Protection	Provided
Conformance/ Compliance		
1	IS-16101,IS-16102,IS-16104,IS-16105,IS-16106	Conform
2	IS-10322,	Conform
3	Impact Resistance -	IK-05
4	CE /ROHS	Conform

Photometric data:

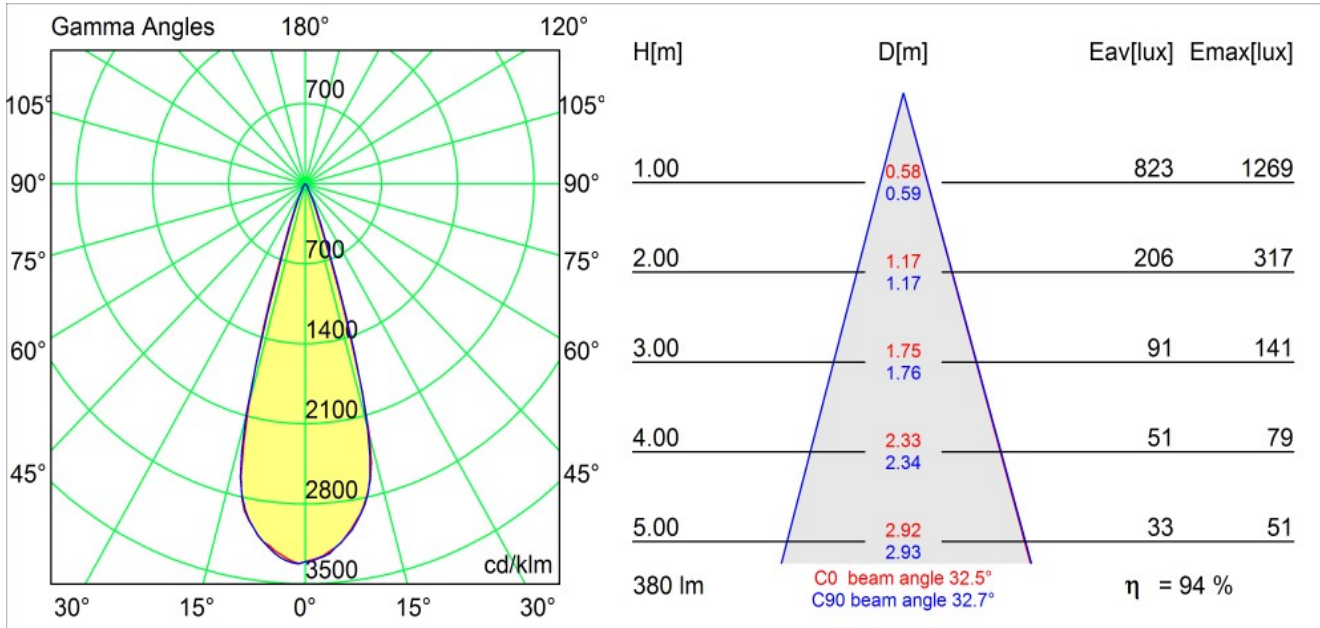

Similar Product Pics:



Product Name	Wattage	Color Temperature	Product Code
LED Ground Burial Uplighter	3	WW/NW/CW	NPWLGBU3w WW/NW/CW
LED Ground Burial Uplighter	6	WW/NW/CW	NPWLGBU6w WW/NW/CW
LED Ground Burial Uplighter	15	WW/NW/CW	NPWLGBU15w WW/NW/CW
LED Ground Burial Uplighter	24	WW/NW/CW	NPWLGBU24w WW/NW/CW

WLT CORP

C.O: 103, jaina Tower 2, Janakpuri
District Centre, New Delhi-110058
Ph-011-45102277
Email – WLT Corp14gmail.com

