



## LED Street Light

nikkou



### NIKKOU LED Streetlight

#### Benefits

- Saving up to 60-70% Compared to High intensity discharge lamps
- Better visibility & uniformity
- Minimum Maintenance

#### Features

- Efficient Secondary optics
- Adjustable angle
- Selectable power option
- Useful life of 50,000 Hours


#### Application

- Roadways
- Township Compound
- Factories


Technical Data Sheet of 60 W LED Street Light		
S.No	Technical Parameters	Specified values
<b>Electrical Parameters</b>		
1	Input Voltage range	90 V-270 V AC
2	Rated Wattage	60 W
3	Power factor	≥ 0.95
4	Total harmonic Distortion (THD)	≤ 10%
5	Driver Efficiency	≥ 92%
6	LED Driving Current	350mA to 500mA
7	Control Circuit	CCCV Compatible to LED
<b>Optical Parameters</b>		
1	LED Make	OSRAM/NICHIA/CREE
2	LED Efficacy	≥ 130 Lumen/watt
3	Color Temperature (CCT)	5500 K to 6500K
4	Color rendering Index (CRI)	≥75
5	Total Lumen Output	6000 Lumen
6	Optical Efficiency	≥90%
7	Beam Angle	>120 °
8	Uniformity	>0.33 as per IS 1944
9	LED Life	≥50,000 hours
10	Illumination Footprint	3.2Hx1.2H
<b>Mechanical Parameters</b>		
1	Luminaire Casing	PDC AL.LM6063
2	Cover	Toughened Glass
3	Pole Entry	40 MM Dia
4	Diffuser Efficiency	≥95%
5	Lens Make	Ledlink/LSGC/ Khathod/ carclos
6	Material used for MCPCB	AL.Metal Core
7	PCB type	For Driver Epoxy FR4 & For LED MCPCB
8	Wires & cables	Wires used are Low smoke halogen free & fire retardant
<b>Functional Parameters</b>		
1	Ingress Protection	Entire housing & Driver is IP 65/66
2	Temperature & humidity	Temperature range -5to 50° and Humidity 10% to 90% RH
3	Aerodynamics	Product can withstand 160 Mph
4	Insulation resistance	IR >2MΩ @500VDC
5	High Voltage Test	1.5 VDC for 1 min
6	Endurance test	400V AC for 4 hours
7	High Voltage Protection	Up to 400V
8	Surge Protection	4KV<SPD<10KV
9	EMI Protection	Provided
<b>Conformance/ Compliance</b>		
1	IS-16101,IS-16102,IS-16104,IS-16105,IS-16106	Conform
2	IS-10322,	Conform
3	Impact Resistance -	IK-05
4	CE /ROHS	Conform

Photometric data:

Luminous Intensity Distribution Curve

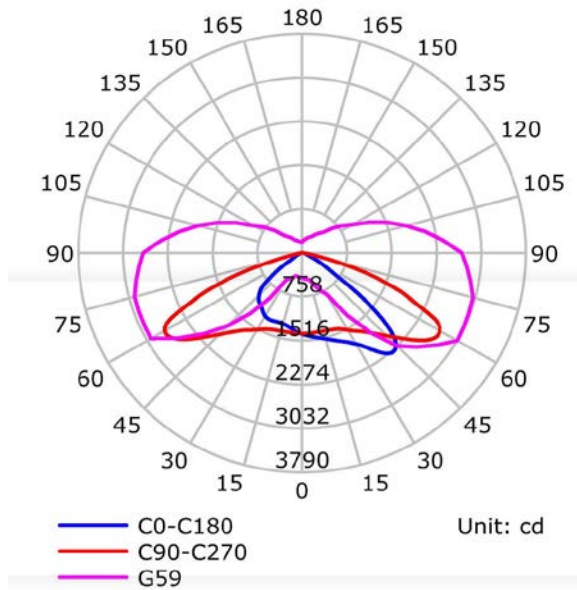

Illuminance at a Distance

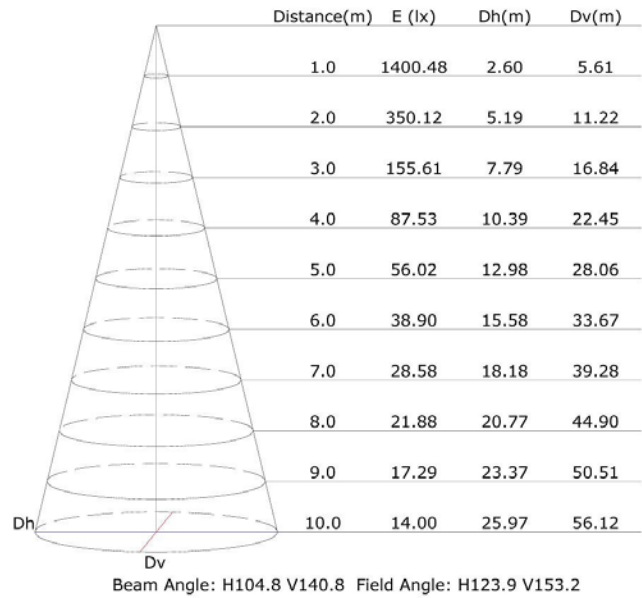

Similar Product Picture:



Product name	Wattage	Color Temperature	Product Code
LED Street Light	50W	WW/NW/CW	NPWLSLe50w WW/NW/CW
LED Street Light	100W	WW/NW/CW	NPWLSLe100w WW/NW/CW
LED Street Light	120W	WW/NW/CW	NPWLSLe120w WW/NW/CW
LED Street Light	180W	WW/NW/CW	NPWLSLe180w WW/NW/CW

