

LED Flood Light

WLT



WLT Flood light

Benefits

- Saving up to 60-70% Compared to High intensity discharge lamps
- Better visibility & uniformity
- Minimum Maintenance

Features

- Efficient Secondary optics
- Adjustable angle
- Selectable power option
- Useful life of 50,000 Hours

Application

- Sports Complex
- Township Compound
- Factories
- Petrol Pumps



WLT CORP

C.O: 103, jaina Tower 2, Janakpuri
District Centre, New Delhi-110058
Ph-011-45102277
Email – WLT Corp14gmail.com

Technical Data Sheet of 120 W LED Flood Light

S.No	Technical Parameters	Specified values
Electrical Parameters		
1	Input Voltage range	90 V-270 V AC
2	Rated Wattage	120 W
3	Power factor	≥ 0.95
4	Total harmonic Distortion (THD)	≤ 10%
5	Driver Efficiency	≥ 92%
6	LED Driving Current	350mA to 500mA
7	Control Circuit	CCCV Compatible to LED
Optical Parameters		
1	LED Make	OSRAM/NICHIA/CREE
2	LED Efficacy	≥ 130 Lumen/watt
3	Color Temperature (CCT)	5500 K to 6500K
4	Color rendering Index (CRI)	≥75
5	Total Lumen Output	12000 Lumen
6	Optical Efficiency	≥90%
7	Beam Angle	>120 °
8	Uniformity	>0.33 as per IS 1944
9	LED Life	≥50,000 hours
10	Illumination Footprint	As per IS Standard
Mechanical Parameters		
1	Luminaire Casing	PDC AL.LM6063
2	Cover	Toughened Glass
3	Stand Lever	U shape arm for installation
4	Diffuser Efficiency	≥95%
5	Lens Make	Ledlink/LSGC/ Khathod/ carclos
6	Material used for MCPCB	AL.Metal Core
7	PCB type	For Driver Epoxy FR4 & For LED MCPCB
8	Wires & cables	Wires used are Low smoke halogen free & fire retardant
Functional Parameters		
1	Ingress Protection	Entire housing & Driver is IP 65/66
2	Temperature & humidity	Temperature range -5to 50° and Humidity 10% to 90% RH
3	Aerodynamics	Product can withstand 160 Mph
4	Insulation resistance	IR >2MΩ @500VDC
5	High Voltage Test	1.5 VDC for 1 min
6	Endurance test	400V AC for 4 hours
7	High Voltage Protection	Up to 400V
8	Surge Protection	4KV<SPD<10KV
9	EMI Protection	Provided
Conformance/ Compliance		
1	IS-16101,IS-16102,IS-16104,IS-16105,IS-16106	Conform
2	IS-10322,	Conform
3	Impact Resistance -	IK-05
4	CE /ROHS	Conform

Photometric data:

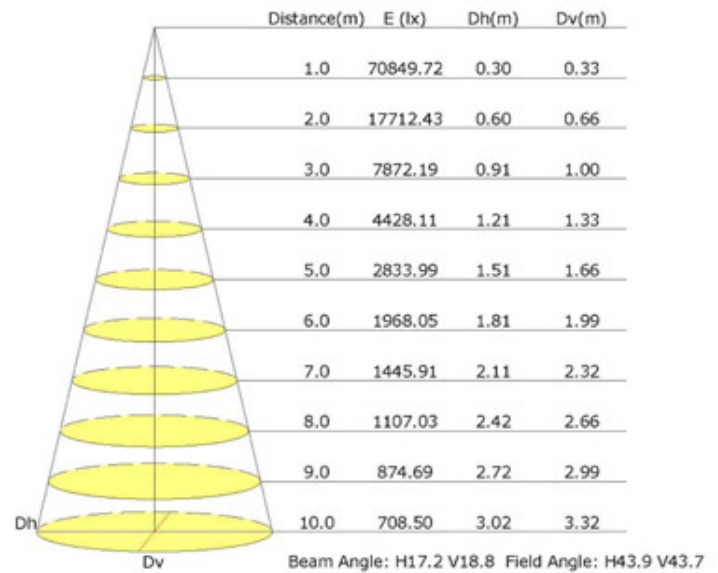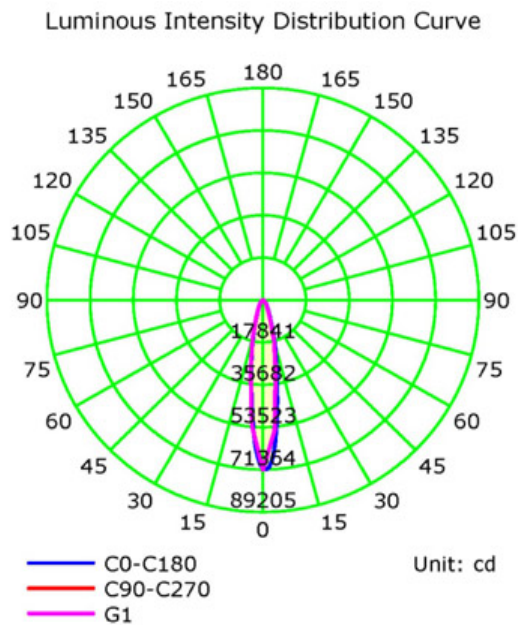

Similar Product Picture:



Product name	Wattage	Color Temperature	Product Code
LED Flood Light	50W	WW/NW/CW	NPWLFL50w WW/NW/CW
LED Flood Light	100W	WW/NW/CW	NPWLFL100w WW/NW/CW
LED Flood Light	120W	WW/NW/CW	NPWLFL120w WW/NW/CW
LED Flood Light	180W	WW/NW/CW	NPWLFL180w WW/NW/CW

WLT CORP

C.O: 103, jaina Tower 2, Janakpuri

District Centre, New Delhi-110058

Ph-011-45102277

Email – WLT Corp14gmail.com

WLT CORP

*C.O: 103, jaina Tower 2, Janakpuri
District Centre, New Delhi-110058
Ph-011-45102277
Email – WLT Corp14gmail.com*